


## BETAETIGER-P-G (Order no. 059226)

### Actuators for safety switches NP/GP/TP

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator

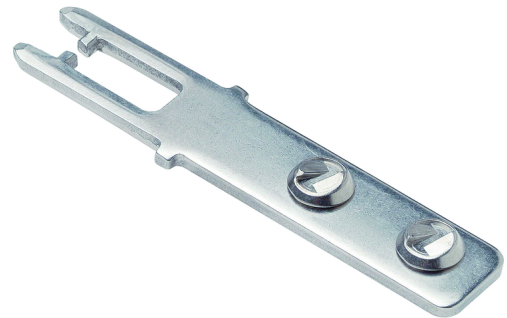


### Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 1,000 mm. Safety screws prevent unscrewing of the actuators.

### Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

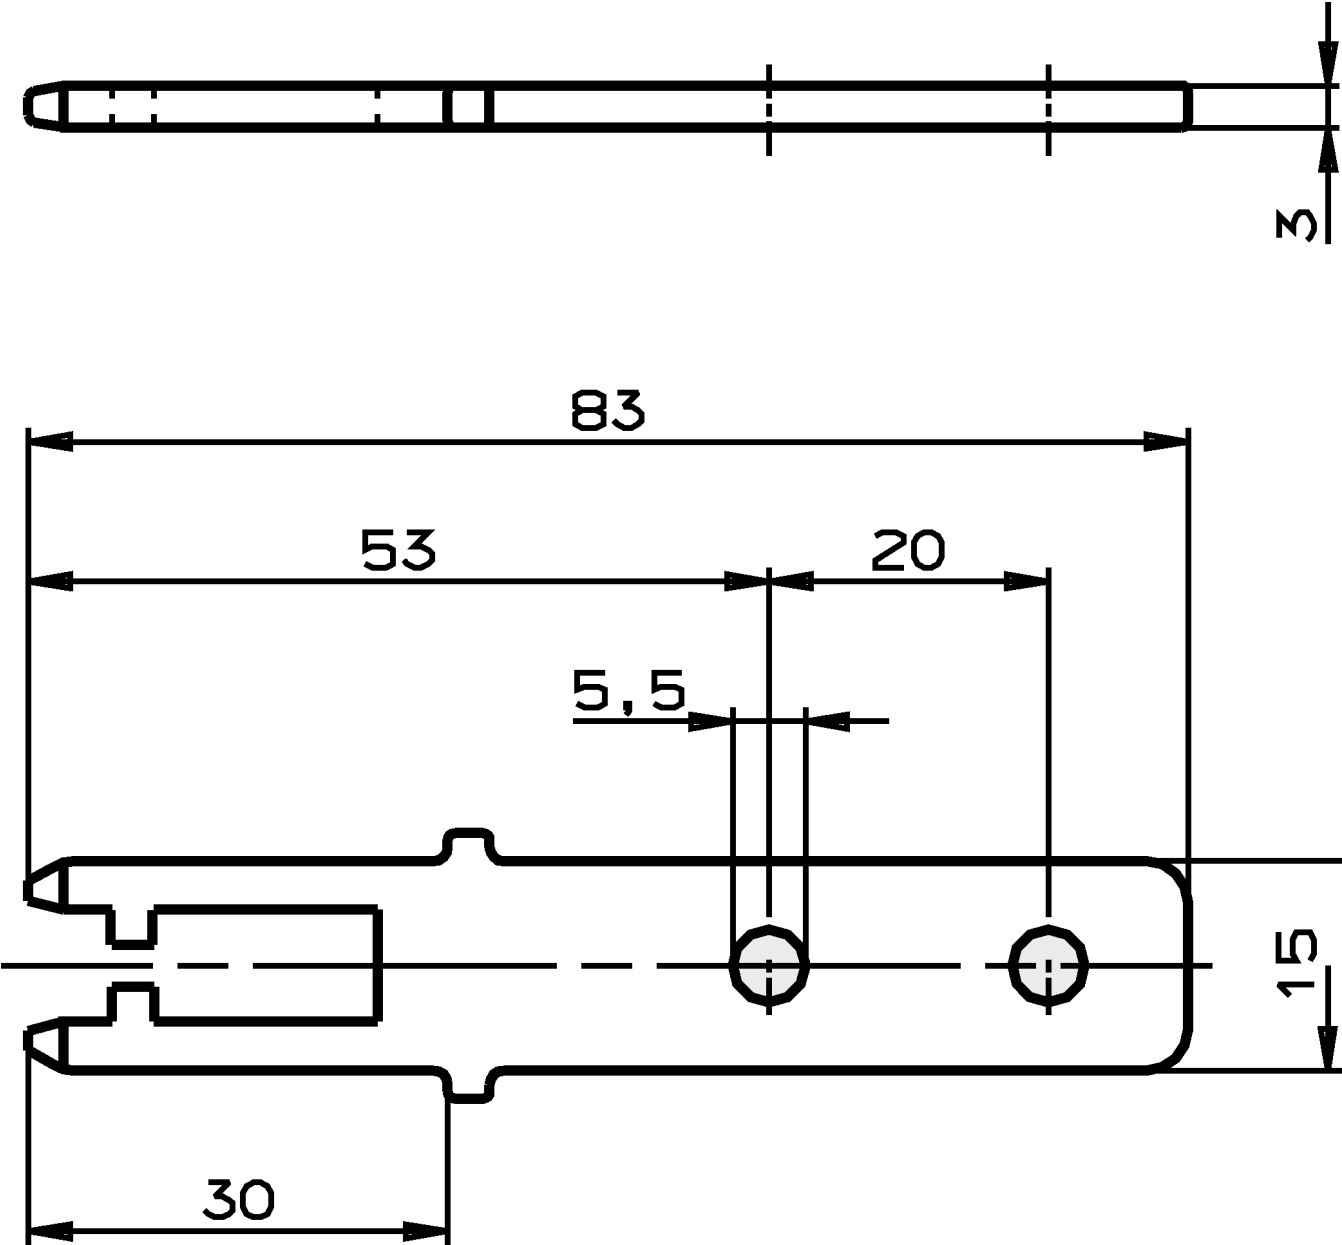

## Technical data

### Mechanical values and environment

Storage temperature	-25 ... 70 °C
Overtravel	max. 2 mm
Door radius	min. 1000 mm
Material	
Actuator	Stainless steel
Screw	Stainless steel

### Miscellaneous

Usability of insertion funnel	No
-------------------------------	----

## Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/059226/?#downloads-tab>

**Ordering data**

Ordernumber	059226
Item designation	BETAETIGER-P-G
Gross weight	0,028kg
Global Trade Item Number (GTIN)	4047048000506
Customs tariff number	85389099990
ECLASS	27-27-26-06 Actuator for safety-related position switch

## Accessories

### Mounting accessories

#### Safety screws M5 x 10

**073455**

M5X10-NIRO/V100

- ▶ Safety screws M5 x 10
- ▶ Packaging unit 100 pieces