


BETAETIGER-P-GN (Order no. 074570)

Actuator for safety switch NP/GP/TP, increased overtravel

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator

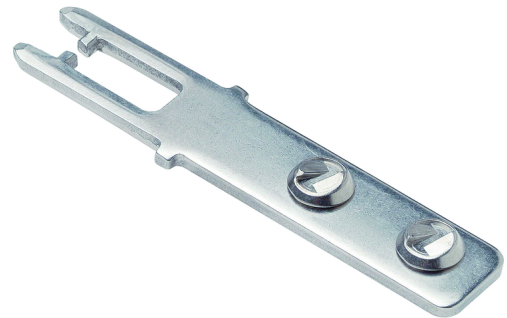


Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 1,000 mm. Safety screws prevent unscrewing of the actuators.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

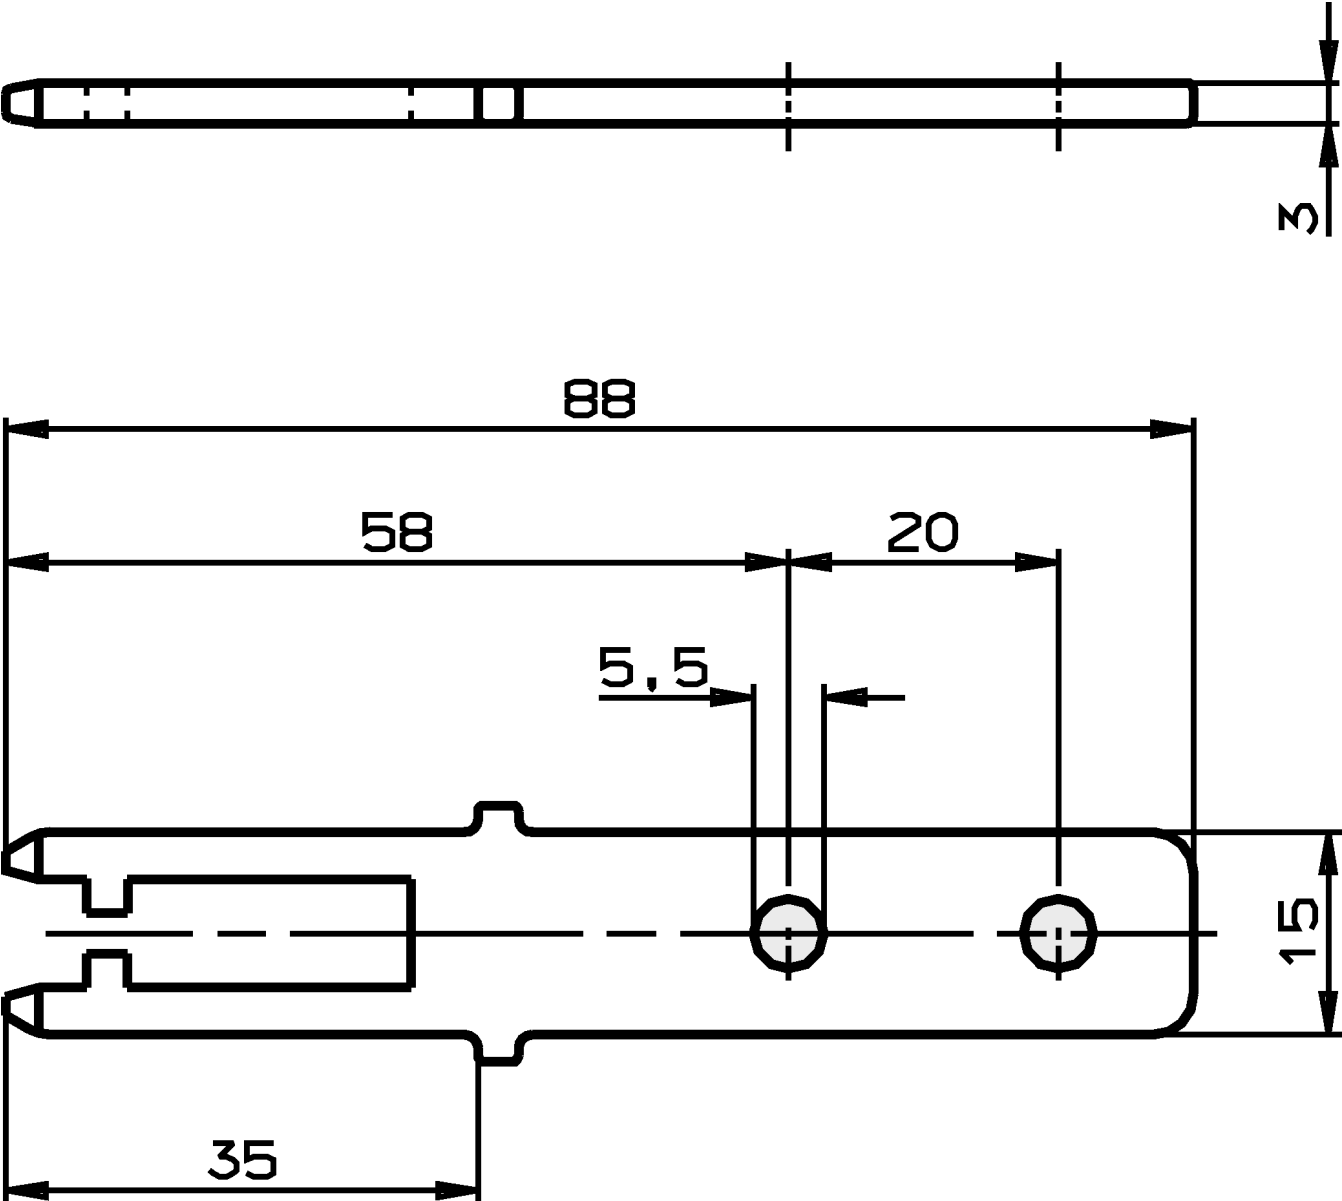

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C
Overtravel	max. 7 mm
Door radius	min. 1000 mm
Material	
Actuator	Stainless steel
Screw	Stainless steel

Miscellaneous

Usability of insertion funnel	Yes
-------------------------------	-----

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/074570/?#downloads-tab>

Ordering data

Ordernumber	074570
Item designation	BETAETIGER-P-GN
Gross weight	0,029kg
Customs tariff number	85389099990
ECLASS	27-27-26-06 Actuator for safety-related position switch

Accessories

Mounting accessories

Safety screws M5 x 10

073455

M5X10-NIRO/V100

- ▶ Safety screws M5 x 10
- ▶ Packaging unit 100 pieces