

# PLUNGER UP or DOWN, COOLING

## 3/2 Directional Control Valve - Manifold Design

- High-speed poppet construction
- Constant repeatability
- Non friction seat seals
- Non-lube
- Specialised low-wear body-coating
- Quick exhaust, pressure booster options
- Solenoid, remote pilot options
- Locking, non-locking manual overrides
- Base options



**Model Number: D3900A0844**

### STANDARD SPECIFICATIONS

**Solenoids:** Standard voltages 200-240 volts 50/60 Hz;  
100-120 volts 50/60 Hz; 110 volts d.c. 24 volts d.c.


**Power Consumption:** 10,9 VA inrush, 8,5 VA holding on  
50 or 60 Hz; 6 watts on d.c.

**Flow Medium:** Filtered air.

**Ambient Temperature:** -17° to 80° C (0° to 175° F).

**Media Temperature:** -17° to 150° C (0° to 300° F).

**Inlet Pressure:** 2 to 10 bar (30 to 150 psig).

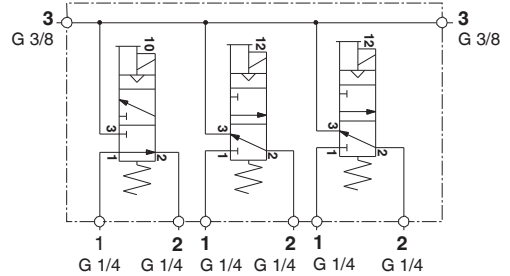

We reserve the right to introduce technical modifications.

### Dimensions - mm (inches)

