


- Adopt thermostable phenolic plastic crust;
- Small contact gap, snap action, high sensitivity and small operating travel;
- Variety of levers;
- Widely used in appliance, electronic equipment, automatic machine, communication equipment, car electric, apparatus and instrument, electro motion tool etc.

Model & Meanings



Mounting Hole Dimensions & Product Structure

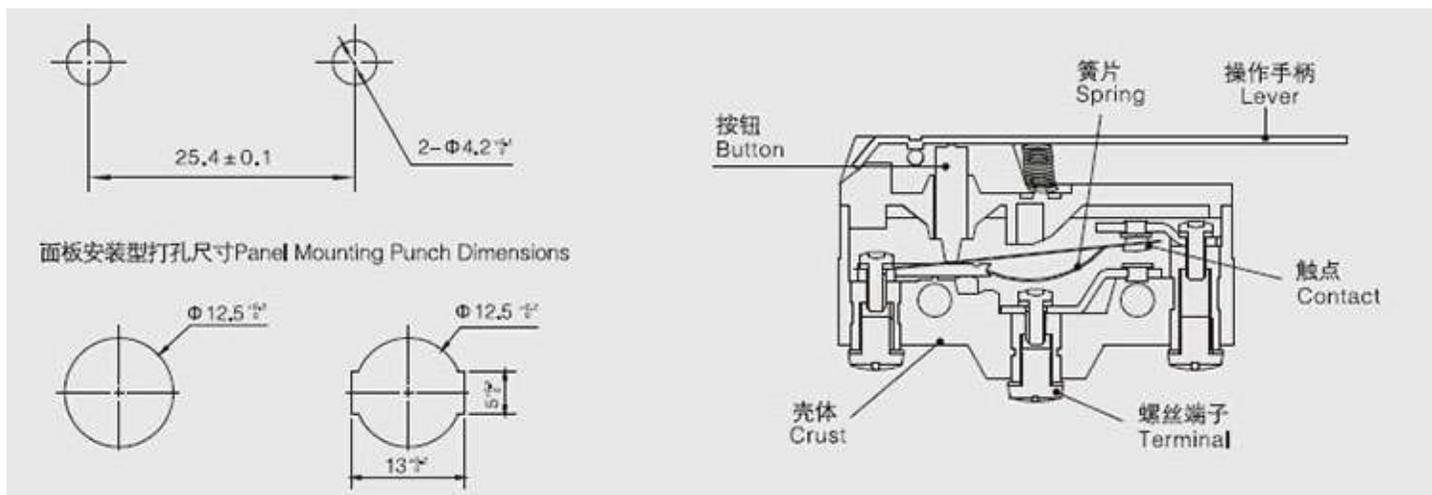


Specification

项目 Item	参数值 Data	
操作速度 Operating speed	1mm-1m/s	
操作频率 Operating frequency	机械 Mechanical	240次/分 240 times/min
	电气 Electrical	20次/分 20 times/min
绝缘电阻 Insulation resistance	100MΩ以上(Above) DC500V	
接触电阻 Contact resistance	25mΩ(初值 initial value)	
介质耐压 Withstand voltage	非连线 Non-connection wire	1000VAC
	各端子间 Every terminal	1500VAC
振动 Vibration	误动作 Misoperation	10-55Hz Amplitude (复振幅) 1.5mm
冲击 Impact	耐久 Durable	1000m/s ²
	误动作 Misoperation	300m/s ²
寿命 Life	电气 Electrical	100,000次以上 above
	机械 Mechanical	1,000,000次以上 above
防护等级 Protection degree	IP40	
使用温度 Operating temperature	-25~+80°C	
使用湿度 Operating humidity	<85%	

额定值 Rating

额定电压Ue(V)	额定电流Ie(A)	发热电流Ith(A)
AC-250	15	20
AC-125	15	20
DC-250	0.3	0.45
DC-125	0.6	0.75

Contact Form

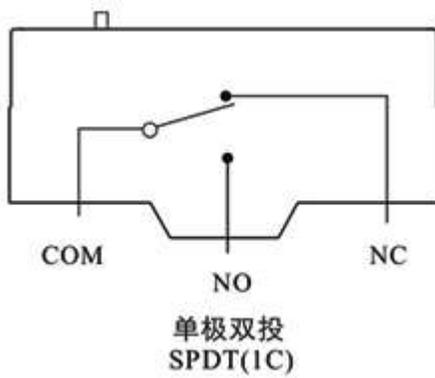

Terminal Form

