


Strong Zinc cast outer shell, strong structure and high mechanical strength;


- Preventing oil, water and pressure;
- Double way switch, double spring inner switch;
- Variety of levers;
- Widely used in Mechanical equipment, automatic machine, and instrument, electro motion tool etc.

### Model & Meanings


XZ - 5 / 101

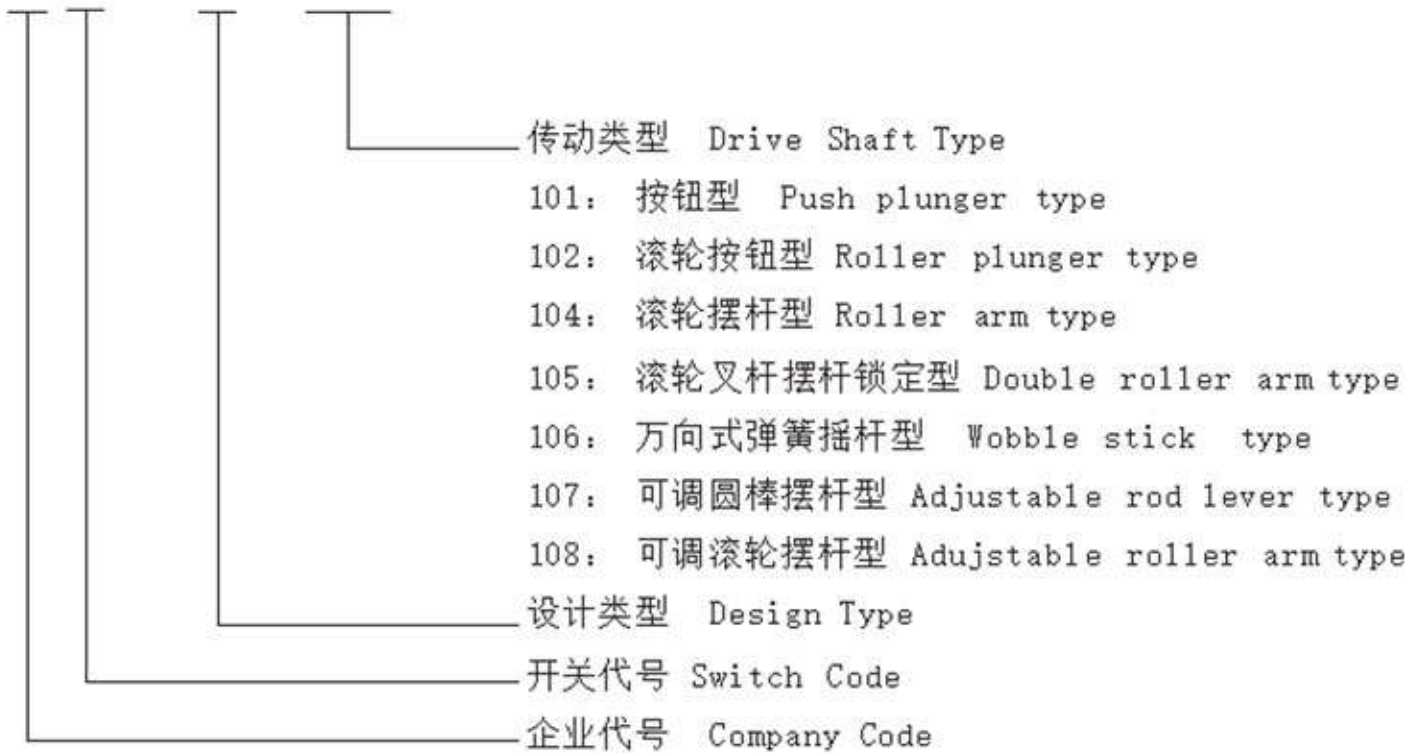

### Mounting Holes & Contact Form

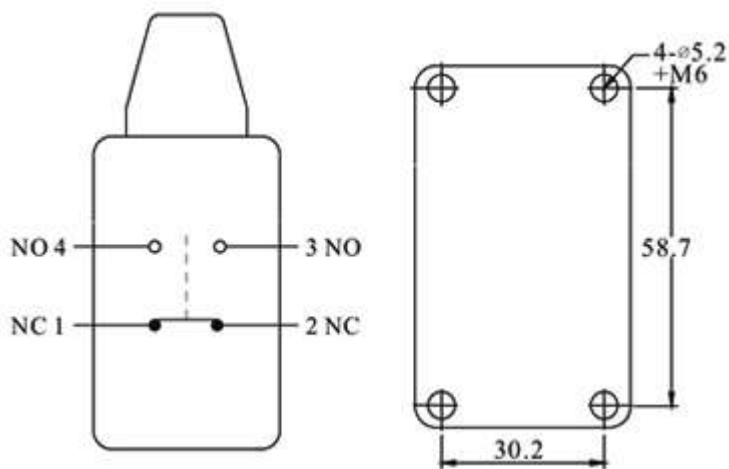

## Product Structure

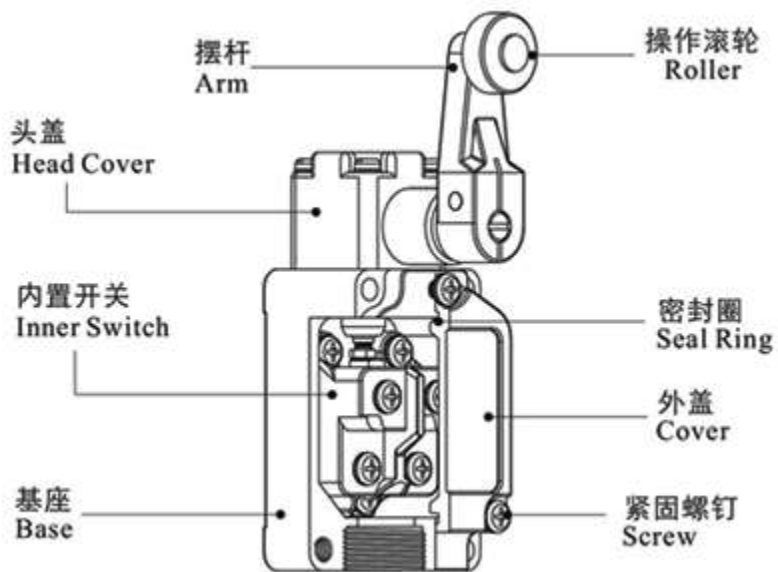


## Specification

项目 Item	参数值 Data	
额定负荷 Rating load	10A/250VAC	
操作速度 Operation speed	1mm-1m/s	
操作频率 Operation frequency	机械 Mechanical	120次/分 120times/min
	电气 Electrical	30次/分 30times/min
绝缘电阻 Insulation resistance	100mΩ以上(Above) DC500V	
绝缘电阻 Contact resistance	25mΩ初值 initial value)	
介质耐压 Withstand voltage	非连线 Non-connection wire	1000VAC
	各端子间 Every terminal	1500VAC
振动 Vibration	误动作 Misoperation	10-55Hz Amplitude (复振幅) 1.5mm
冲击 Impact	耐久 Durable	1000m/s <sup>2</sup>
	误动作 Misoperation	300m/s <sup>2</sup>

寿命 Life	电气 Electrical	100,000次以上 above
	机械 Mechanical	1,000,000次以上 above
防护等级 Protection degree		IP66
使用温度 Operating temperature		-10~+80°C
使用湿度 Operating humidity		<85%

### Dimensions/Operating Characteristics

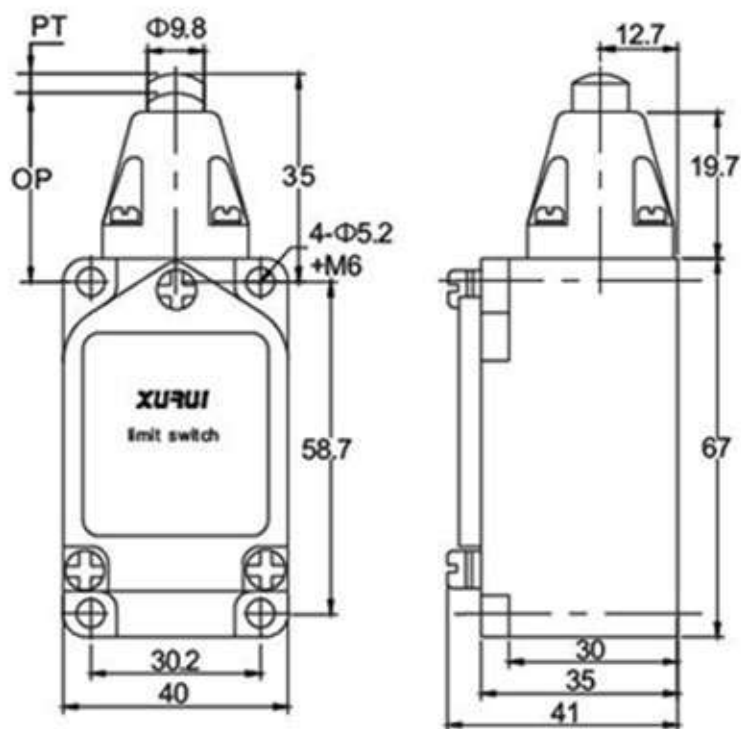

OF max.动作力	2750g(26.95N)
RF min.回复力	900g(8.82N)
PT max.预行程	1.7mm
OT min.超行程	4mm
MD max.差行程	1.2mm
OP 动作位置	34±0.8mm